
V-RAD 14

Part Number: 13583

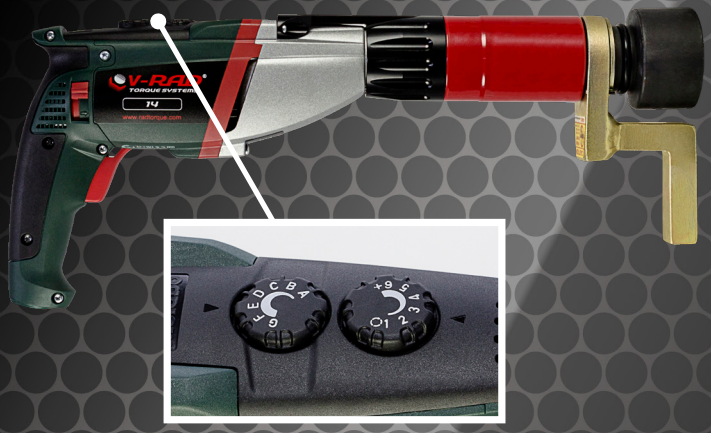

400 - 1.350 Nm

MAX SPEED 8 RPM

QUICK TORQUE SETTING

LIGHT AND EASY

90º VERSION


OPTION

SPECIFICATIONS

- ***TORQUE RANGE:*** 400 - 1.350 Nm.
- ***SPEED:*** 8 RPM.
- ***WEIGHT:*** 4,9 Kg, excluding reaction arm and socket.
- ***SQUARE DRIVE:*** ¾ inch square drive.
- ***NOISE LEVEL:*** Maximum 80 dB.
- ***TORQUE SETTING:*** 18 fixed torque settings.
- ***REPEATABILITY ON SAME JOINT*:** +/- 5%.


** Test results from RAD's certified calibration lab*

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 16667	**PN: 13367**	**PN: 13368**

Blank	Double ended blank	Safety sliding
		
PN: 13364	**PN: 13365**	**PN: 25243**

DIMENSIONS IN MM

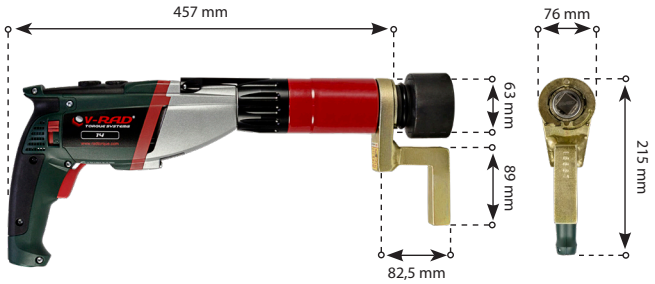

TOOL KIT INCLUDING

- *V-RAD 14*
- *Standard reaction arm* **(PN: 16667)**
- *Retaining ring* **(PN: 12733)**
- *Calibration certificate*
- *Usermanual*
- *Safety instructions on USB stick*
- *Weatherproof storage case*



ACCESSOIRES

Product	Part number
Swivelling tool handle (option)	15956
Tool hanger (option)	12729
120V version (option)	17303

Non Impacting

Safe & Reliable

According to European standards

LABORATORY ACCREDITATION BUREAU
ACCREDITED ISO/IEC 17025
Accredited ISO/IEC 17025