
14 GX TV

Part Number: 22079

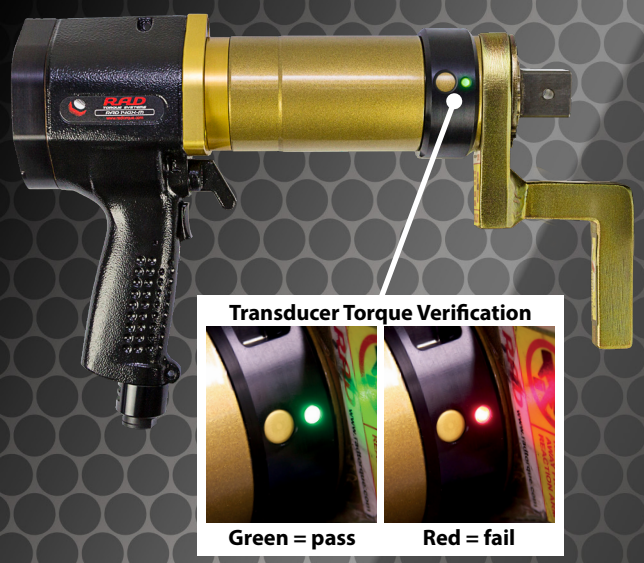

275 - 1.350 Nm

MAX SPEED 20 RPM

TRANSDUCER MONITORED

DATA LOGGING

INTEGRATED BATTERY PACK

LIVE FLANGE MONITORING

SPECIFICATIONS

- ***TORQUE RANGE:*** 275 - 1.350 Nm.
- ***SPEED:*** 20 RPM.
- ***WEIGHT:*** 4,1 Kg, excluding reaction arm and impact socket.
- ***SQUARE DRIVE:*** ¾ inch square drive.
- ***NOISE LEVEL:*** 80 dB.
- ***ACCURACY TRANSDUCER:*** +/- 1%.
- ***REPEATABILITY ON SAME JOINT*:** +/- 2%.


** -Test results from RAD's certified calibration lab*

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 16667	**PN: 13367**	**PN: 13368**

Blank	Double ended blank	Safety sliding
		
PN: 13364	**PN: 13365**	**PN: 25243**

DIMENSIONS IN MM

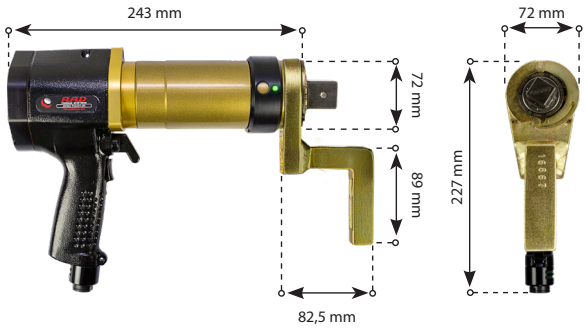



Lightweight FRL unit (2 Kg)

TOOL KIT INCLUDING

- *14 GX TV*
- *Standard reaction arm* **(PN: 16667)**
- *Retaining ring* **(PN: 12733)**
- *Lightweight FRL unit (2 Kg)*
- *3.6 meter hose*
- *Airmotor oil for the FRL unit*
- *User manual*
- *Calibration certificate*
- *Safety instruction on USB stick*
- *Tablet + RAD Connect - PRODOCS app*

Android app on Google play



ACCESSOIRES

Product	*Part number*
Peli cube case (option)	200317

Non Impacting

Safe & Reliable

Download for Android

According to European standards

LABORATORY ACCREDITATION BUREAU
ACCREDITED ISO/IEC 17025
Accredited ISO/IEC 17025