B-RAD SELECT 475

Part Number: 25249



Torque setting adjustable per 10 Nm

100 - 475 Nm

MAX SPEED 24 RPM

DIGITAL TORQUE SETTING

FAST AND LIGHT

DOUBLE SAFETY BUTTON

OPTION


SPECIFICATIONS

- ***TORQUE RANGE:*** 100 - 475 Nm.
- ***SPEED:*** 24 RPM.
- ***WEIGHT:*** 3,2 Kg with battery, excluding reaction arm and impact socket.
- ***SQUARE DRIVE:*** ¾ inch square drive.
- ***BATTERY:*** Two 18V Li-ion batteries 5.2Amp/93 Wh.
- ***NOISE LEVEL:*** Maximum 80 dB.
- ***REPEATABILITY ON SAME JOINT**:** +/- 3%.

** Test results from RAD's certified calibration lab*


SUITABLE REACTION ARMS

Standard




PN: 10686

Deep socket



PN: 10687

Double ended



PN: 10688

Blank



PN: 10036

Double ended blank




PN: 10037

Safety sliding



On request

DIMENSIONS IN MM

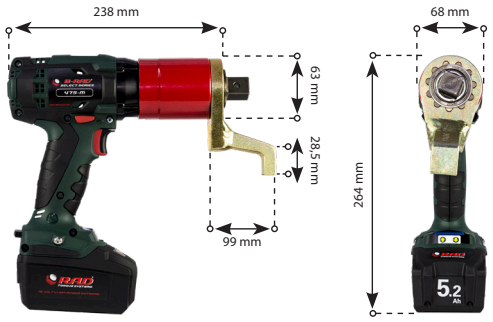

TOOL KIT INCLUDING

- *B-RAD SELECT 475*
- *Standard reaction arm* **(PN: 10686)**
- *Retaining ring* **(PN: 10306)**
- *Two batteries with quick charger*
- *Calibration certificate*
- *Usermanual*
- *Safety instructions on USB stick*
- *Weatherproof storage case*



ACCESSOIRES

Product	Part number
7.0 Ah LiHD battery (126 wh) (option)	200321
Double Safety Trigger (option)	25949

Non Impacting

Safe & Reliable

Lithium-ion battery

According to European standards

LABORATORY ACCREDITATION BUREAU
ACCREDITED ISO/IEC 17025
Accredited ISO/IEC 17025