MV-RAD 45

Part Number: 200283



450 - 4.500 Nm

MAX SPEED 3 RPM

MAINTENANCE COUNTER

DIGITAL TORQUE SETTING

TORQUE + ANGLE FUNCTION

TORQUE CHECK FUNCTION

OPTION

SPECIFICATIONS

- ***TORQUE RANGE:*** 450 - 4.500 Nm.
- ***SPEED:*** 3 RPM.
- ***WEIGHT:*** 8,8 Kg, excluding reaction arm and socket.
- ***SQUARE DRIVE:*** 1 inch square drive (replaceable).
- ***NOISE LEVEL:*** Maximum 80 dB.
- ***TORQUE SETTING:*** 1 Nm incremental or 200 torque settings.
- ***PRESETS:*** 8 programmable presets.
- ***INTELLIGENT COUNTER:*** maintenance counter.
- ***REPEATABILITY ON SAME JOINT*:** +/- 3,5%.


** Test results from RAD's certified calibration lab*

SUITABLE REACTION ARMS

Standard	Deep socket	Double ended
		
PN: 17748	**PN: 11534**	**PN: 11533**

Blank	Double ended blank	Safety sliding
		
PN: 11530	**PN: 11532**	**PN: 21377**

DIMENSIONS IN MM

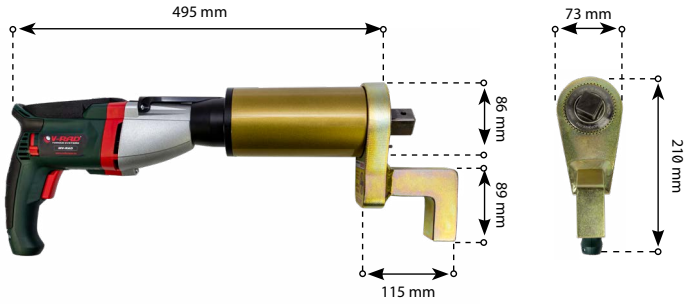

TOOL KIT INCLUDING

- *MV-RAD 45*
- *Standard reaction arm* **(PN: 17748)**
- *Retaining ring* **(PN: 10032)**
- *Calibration certificate*
- *Usermanual*
- *Safety instructions on USB stick*
- *Weatherproof storage case*



ACCESSOIRES

Product	*Part number*
Tool hanger (option)	On request
120V version (option)	17303

Non Impacting

Safe & Reliable

Torque + angle function

According to European standards

LABORATORY ACCREDITATION BUREAU
ACCREDITED ISO/IEC 17025
Accredited ISO/IEC 17025