# V-RAD 31-90⁰

**Part Number: 21947**




**1.100 - 3.100 Nm**

**MAX SPEED 4 RPM**

**QUICK TORQUE SETTING**



**LIGHT AND EASY**

## SPECIFICATIONS

- ***TORQUE RANGE:*** 1.100 - 3.100 Nm.
- ***SPEED:*** 4 RPM.
- ***WEIGHT:*** 7,3 Kg, excluding reaction arm and socket.
- ***SQUARE DRIVE:*** 1 inch square drive.
- ***NOISE LEVEL:*** Maximum 80 dB.
- ***TORQUE SETTING:*** 18 fixed torque settings.
- ***REPEATABILITY ON SAME JOINT*:** +/- 5%.

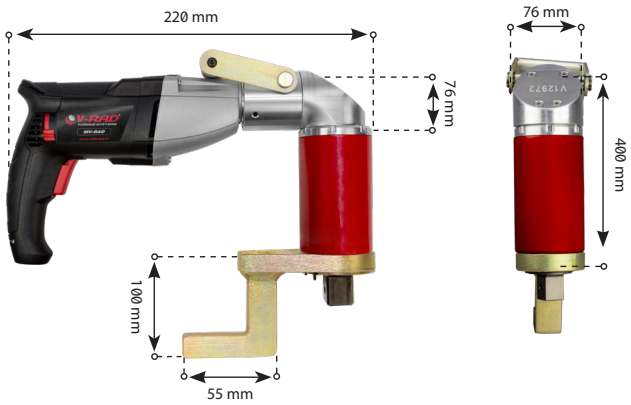
** Test results from RAD's certified calibration lab*

## SUITABLE REACTION ARMS

| Standard | Deep socket | Double ended |
|---|---|---|
|  |  |  |
| **PN: 16670** | **PN: 10515** | **PN: 10516** |

| Blank | Double ended blank | Safety sliding |
|---|---|---|
|  |  |  |
| **PN: 10513** | **PN: 10448** | **On request** |

## DIMENSIONS IN MM




## TOOL KIT INCLUDING

- *V-RAD 34-90⁰*
- *Standard reaction arm* **(PN: 16670)**
- *Retaining ring* **(PN: 10509)**
- *Calibration certificate*
- *Usermanual*
- *Safety instructions on USB stick*
- *Weatherproof storage case*



## ACCESSOIRES

| Product | Part number |
|---|---|
| 120V version (option) | 17303 |

Non Impacting

Safe & Reliable

According to European standards

LABORATORY ACCREDITATION BUREAU ACCREDITED ISO/IEC 17025
Accredited ISO/IEC 17025